

Documentation for TecIR program


SAMSYNC Version 1.1

Hardware Requirements

- TecIR Controller with SAMSYNC firmware chip with pre-programmed cycle time (MM:SS) and power adapter.
- Samsung BD-P1600 (or compatible).
- IRR1 or IRR2 infrared transmitter to be placed in front of the infrared receiver.

Program Description

The BD players and the TecIR must be connected to the same power strip and turned on at the same time (you may use a digital timer to automate this process). Upon power-up the TecIR will turn on the power to the BD player, wait roughly 30 seconds and then send the restart command to the player(s). After the pre-programmed time, the controller will send the restart command again to the players.

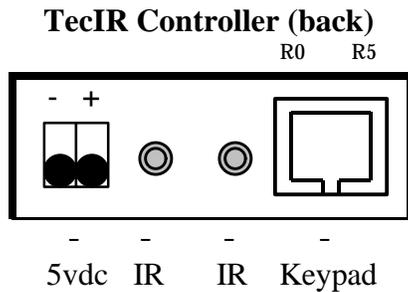

For more information contact: Technovision at (905) 420-5153 (www.technovision.com)